

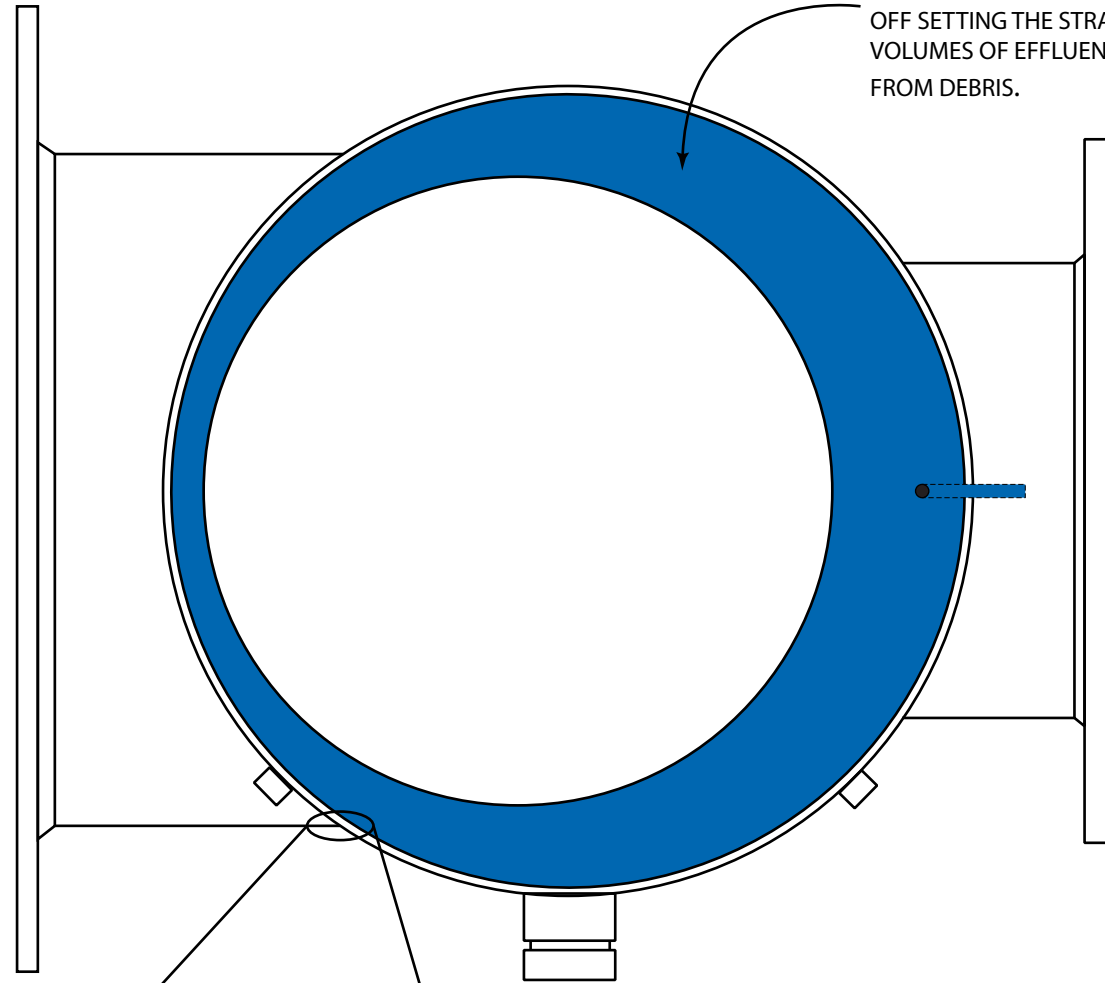


PADDOCK STRAINERS ARE DESIGNED FOR SUPERIOR FLOW AND LESS PRESSURE DROP BY OFF SETTING THE STRAINER BASKET (HIGHLIGHTED IN BLUE). THIS FEATURE ALLOWS LARGER VOLUMES OF EFFLUENT WATER TO THE PUMP EVEN UNDER HEAVY BASKET LOADING FROM DEBRIS.

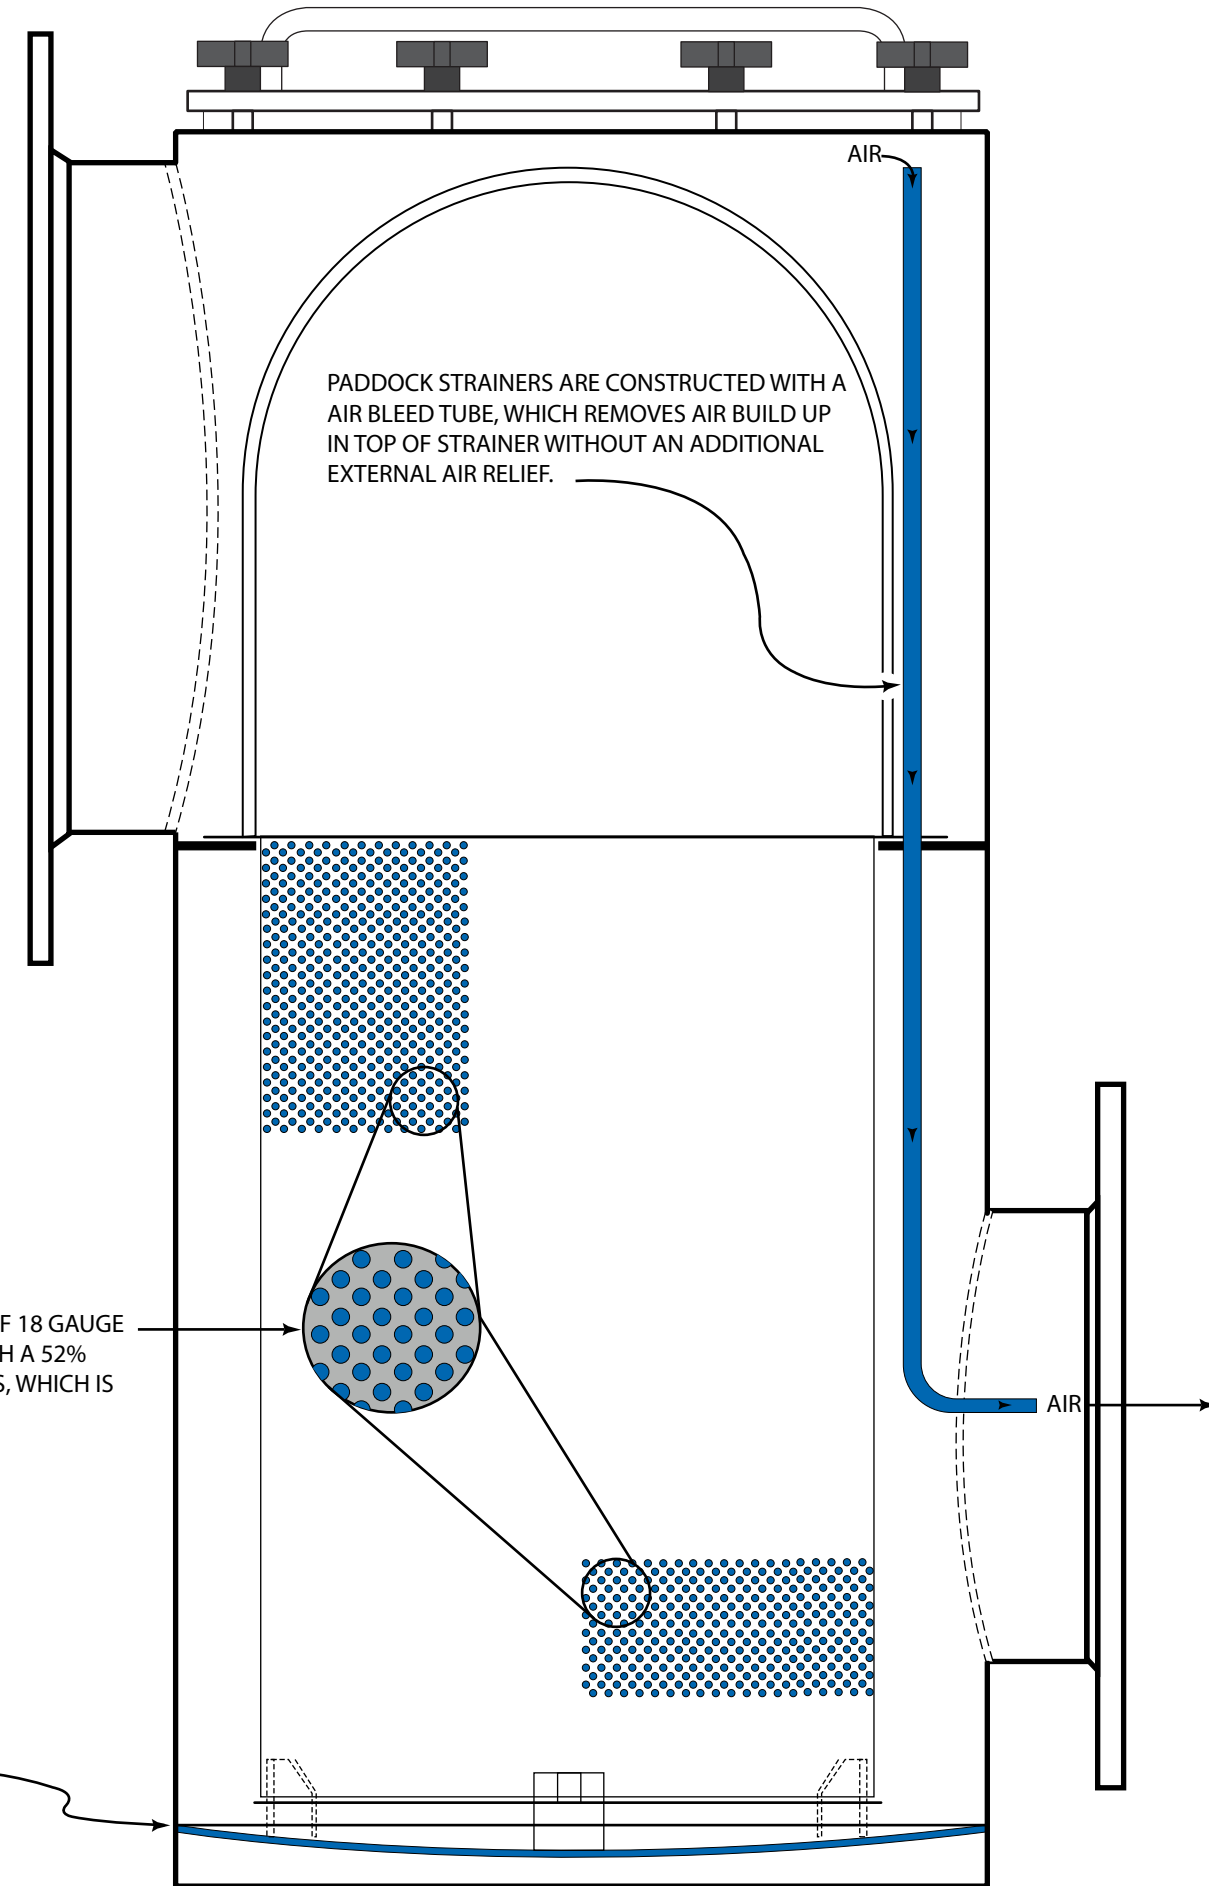

PADDOCK STRAINERS ARE FABRICATED FROM TYPE 304 1/8" THICK STAINLESS STEEL MATERIAL AND COATED WITH EPOXY PAINT

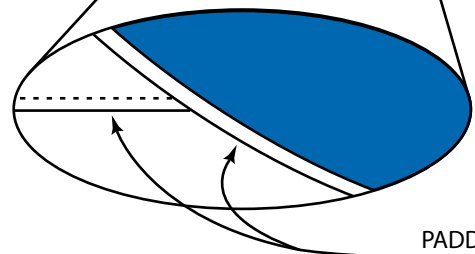

PADDOCK STRAINERS ARE CONSTRUCTED WITH AN AIR BLEED TUBE, WHICH REMOVES AIR BUILD UP IN TOP OF STRAINER WITHOUT AN ADDITIONAL EXTERNAL AIR RELIEF.

PERFORATED BASKET IS CONSTRUCTED OF 18 GAUGE TYPE 304 STAINLESS STEEL MATERIAL WITH A 52% OPEN AREA AND 1/8" PERFORATED HOLES, WHICH IS COMPLIANT IN ALL 50 STATES.

PADDOCK STRAINERS ARE FABRICATED WITH A DOMED BOTTOM. THIS FEATURE ALLOWS PADDOCK STRAINERS TO DISSIPATE WATER HAMMER MORE EFFECTIVELY AND DECREASE THE FORCE OF IMPACT TO OTHER COMPONENTS



PADDOCK
POOL EQUIPMENT COMPANY

555 PADDOCK PARKWAY, ROCK HILL, SC 29730 (T)803-324-1111 1-800-849-2729

(F)803-324-1116 INFO@PADDOCKINDUSTRIES.COM