


- GENERAL NOTES:**
1. TANK MATERIAL-316L STAINLESS STEEL
 2. EXTERIOR SURFACES TO BE COATED WITH BLUE PAD-COTE, AN NSF LISTED CHEMICALLY CURED SEMI-GLOSS EPOXY.
 3. INTERCONNECTING PIPING-SCH. 80 PVC, MAX. VELOCITY LESS THAN 10 FPS.
 4. FILTER WORKING PRESSURE IS 50 PSI. TEST PRESSURE IS 65 PSI.
 5. TANK WARRANTED AGAINST DEFECTS IN MATERIAL AND WORKMANSHIP PER SPECIFICATIONS.

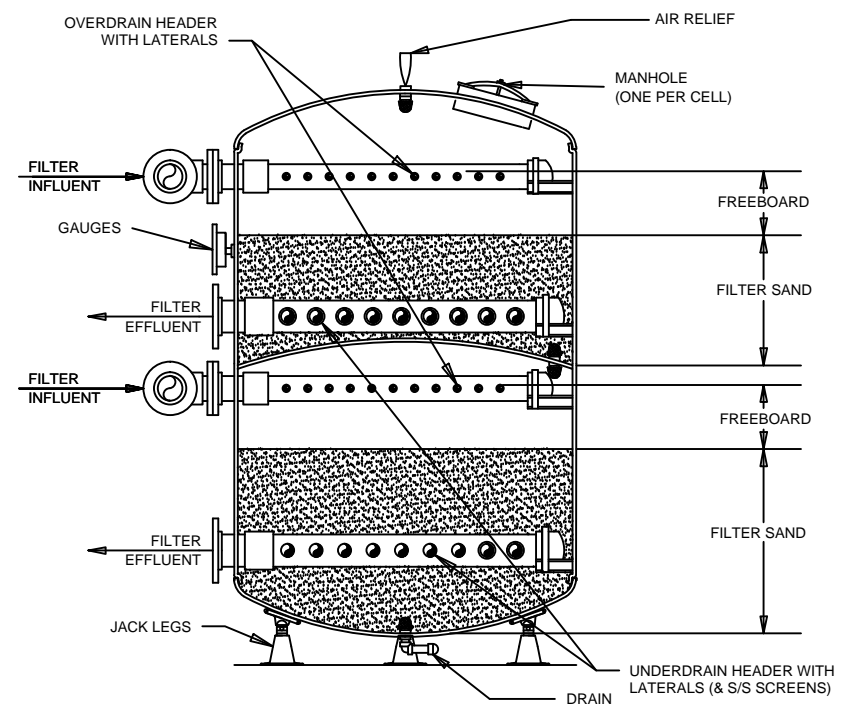

FILTER SECTION

FILTER RATE BOTH CELLS (GPM)	BACKWASH RATE PER CELL (GPM)	FILTER AREA PER CELL (SQ. FT.)	CATALOG NUMBER	SPACE REQUIREMENTS						SAND (CU FT)			INFLUENT CONN. EACH CELL (NPT)	EFFLUENT CONN. EACH CELL (NPT)
				A	B	C	D	E NON-CODE	E CODE	TOP CELL	BOTTOM CELL NON-CODE	BOTTOM CELL CODE		
212	106	7.07	6723-V-2C	36"	78"	120"	58"	95.50"	96.38"	13	14	14	3"	3"
288	144	9.62	6724-V-2C	42"	90"	138"	64"	96.75"	98.00"	17	19	20	4"	4"
376	188	12.57	6725-V-2C	48"	102"	156"	70"	96.88"	101.13"	22	25	26	4"	4"
476	238	15.90	6726-V-2C	54"	114"	174"	76"	* 97.25"	102.88"	28	31	34	4"	4"
588	294	19.60	6727-V-2C	60"	126"	192"	82"	* 96.38"	104.50"	34	39	43	4"	4"
714	357	23.80	6728-V-2C	66"	138"	210"	88"	* 95.75"	106.13"	40	45	52	4"	4"
848	424	28.27	6729-V-2C	72"	150"	228"	92"	* 97.13"	107.88"	47	53	62	6"	6"
996	498	33.20	6730-V-2C	78"	162"	246"	98"	* 97.25"	109.63"	55	63	75	6"	6"
1154	577	38.48	6731-V-2C	84"	174"	264"	104"	* 101.50"	115.25"	64	73	89	6"	6"
1376	663	44.19	6732-V-2C	90"	186"	282"	110"	* 103.00"	117.00"	73	84	103	6"	6"
1508	754	50.26	6733-V-2C	96"	198"	300"	116"	* 115.88"	130.63"	102	114	137	6"	6"
1702	851	56.74	6734-V-2C	102"	210"	318"	122"	* 117.38"	132.38"	116	129	156	6"	6"
1908	954	63.61	6735-V-2C	108"	222"	336"	130"	* 119.00"	134.00"	130	145	175	8"	8"
2126	1063	70.88	6736-V-2C	114"	234"	354"	136"	* 120.63"	135.75"	144	161	196	8"	8"
2356	1178	78.54	6737-V-2C	120"	246"	372"	142"	* 122.50"	137.38"	160	179	218	8"	8"

15 GPM/SQ. FT.
15 GPM/SQ. FT.
(MAX IS 20 GPM/SQ. FT. FOR GRANDFATHERED FILTERS ONLY)

* SHALLOW-DISHED HEADS

BASE CAT. NUMBER FLOW RATE VERTICEL 2 CELLS AUTOMATIC (OPTIONAL)
15 GPM TO 20 GPM

6737-20 V-2C-A

NOTE: LISTED FLOW RATE 15 TO 20 GPM/SQ.FT. FILTER AREA.

CATALOG # 67 - - - - **V - 2C** - -
(Vertical, 2-Cell Filter, " Dia.)

___ GPM Filter Capacity @ ___ GPM/SQ FT of Filter Area
Piping size ___ NPT



Certified to NSF/ANSI Standard 50

SUBMITTAL DRAWING

DISPOSITION	BY	DATE
APPROVED		
AS SUBMITTED		
APPROVED		
AS MODIFIED		
NOT APPROVED		
-- RESUBMIT		



PO Box 11676 email@paddockpool.com (800)849-2729
Rock Hill, SC 29731-1676 Fax: (803)324-1116

DESCRIPTION	TWO-CELL VERTICAL SAND FILTERS
JOB NAME & LOCATION	
CUSTOMER	
DWG/REV	10/6/17
SHEET 1 OF 1	REV 1
DWG. NO.	6723-6737